

PondMAX

WATERGARDENING TO THE MAX

SKIMMER & WATER FEATURE PUMP

INSTRUCTION MANUAL



888.868.1185

info@pondmax.com

www.pondmax.com

FOR MODELS:

**22EV125 - EV700
22EV155 - EV900
22EV175 - EV1200**

**VERSION
MARCH 2024**

WELCOME TO THE WORLD OF PONDMAX™.
YOU MADE THE RIGHT CHOICE INVESTING IN THIS
QUALITY PRODUCT. THANK YOU AND ENJOY.

BEFORE USING THIS PRODUCT, PLEASE READ THESE INSTRUCTIONS CAREFULLY AND
BECOME FAMILIAR WITH THE UNIT. PLEASE KEEP THESE INSTRUCTIONS IN A SAFE
PLACE FOR FUTURE REFERENCE.

TECHNICAL SPECIFICATIONS

DESCRIPTION	EV700	EV900	EV1200
MAXIMUM WATER FLOW(GPH)	700	900	1200
MAXIMUM HEAD (FT)	10	14	15.5
POWER CONSUMPTION* (W)	23	32	45
VOLTS (V)	115	115	115
FREQUENCY (HZ) AC	60	60	60
FRONT FILTER CAGE: FLOW ADJUSTER	Yes	Yes	Yes
FRONT FILTER CAGE: SPONGE PRE-FILTER INC.	Yes	Yes	Yes
INLET Ø THREAD (INCH)	1	1	1
OUTLET Ø THREAD (INCH)	1	1	1
CABLE LENGTH (FT)	32	32	32
RECOMMENDED TUBING SIZE (INCH) ID	1	1	1
RECOMMENDED FOUNTAIN KIT**	#30 Jet Kit	#40 Jet Kit	#40 Jet Kit

* SUBJECT TO VARIATION ACCORDING TO LOAD

** SOLD SEPARATELY

OTHER MODELS AVAILABLE IN THE EVOII RANGE	EV1800	EV2400	EV3000	EV3600
MAXIMUM WATER FLOW(GPH)	1800	2400	3000	3600
MAXIMUM HEAD (FT)	16	20	21	22
VOLTS (V) & FREQUENCY (HZ) AC	115 / 60	115 / 60	115 / 60	115 / 60

SKIMMER & WATER FEATURE PUMPS

DESIGN HIGHLIGHTS

The PondMAX EVOII Skimmer & Water Feature Pumps have been manufactured to provide you with the best quality pumps for your water feature. Visit our website to view our range of pond filtration, outdoor/underwater lighting, water treatments and general accessories.

- **SMART MAG™ Motor Protection** - Provides longevity by preventing motor burnout.
 - **Energy Efficient** - Exceptionally low power consumption to high-head height / high-volume flow conversion.
 - **Threaded Inlet & Outlet** - Suitable for submersible operation and can adapt to different fittings provided.
 - **Can Be Installed Vertical or Horizontal** - Provides flexibility for installation in many different applications.
 - **Open Vane Impeller Design** - Handles large particles and resists clogging.
 - **Adjustable Flow Control** - Meet the demands of your application and
-

BENEFITS INCLUDE

- PondMax Skimmer & Water Feature pumps are suitable for use in many different applications including skimmers, water features, aquatic systems and hydroponics. Your pump can be used in submersible applications.
- Skimmer & Water Feature pumps are a magnetically driven pump, therefore they cannot suck from a water level that is below the inlet level.
- Your pump has a single moving part (an impeller) enabling easy cleaning and maintenance.
- The models EV700 - EV3600 Pumps have SMART MAG™ motor protection, which analyses the speed and torque of the motor.
- SMART MAG™ intelligent circuitry also provides a soft start for the pump on startup and helps to avoid any sudden jolting. The intelligent system will change the motor speed to maximize the flow of water in the given circumstances.
- Also if the Impeller gets jammed or stops, the circuitry will sense the state and cut the power automatically for 3 seconds and then power up again. This procedure will repeat 3 times. If the rotor is still jammed, it will activate a prolonged low state, till the pump is turned off, and adequate maintenance is carried out. Thus minimizing motor burnout, due to electrical heat, through lack of water flow through the motor.
- The motor and electrical components are totally encapsulated in epoxy resin, ensuring safe operation under water.
- The pump has a robust bearing and shaft design so no Oil/grease lubrication is required.
- Skimmer & Water Feature pumps rely on water to cool and lubricate it. Therefore no harmful oil or grease lubrication is required.
- PondMAX Skimmer & Water Feature Pumps are continuous rated therefore are designed to operate 24/7.
- An optional fountain kit can be purchased and fitted to the models EV700 - EV1200 pumps. These models include an optional sponge pre-filter that assists in straining the partials in the water, to assist the fountain nozzles becoming blocked up with debris. See your retailer for options.



IMPORTANT SAFEGUARDS

Correct and safe use of the system requires strict compliance with the safety instructions. For safety reasons, persons less than 16 years of age or persons that are not familiar with these instructions should not use this equipment.

- Any damage to the equipment or unmerited operation will bring dangers to the surrounding precincts. If there is any damage of the equipment, it must not be used. The equipment should be placed out of reach of children.
- For your own safety, disconnect from the power supply before any maintenance. Always unplug the pump from the power supply when not in use. Never pull the cable to disconnect the plug from the power supply - grasp the plug and pull to disconnect. If required, have a qualified electrician install a weatherproof power supply point near to the pond or water-feature (within the cable length of the appliance).
- When used in submerged application, be sure the equipment is completely in the water. The depth should not be greater than 6.5Ft.
- Do not operate the pump if the appliance or any components of the system, such as the power cable, has been damaged. Check appliance for defects regularly.
- For safety, plug the pump into an electrical outlet with a (GCFI) Ground Fault Circuit Interrupter.
- To avoid an electric shock, do not attach the plug to the power supply socket with wet hands. The drip loop method should be used to prevent water from traveling down the cable and onto the plug or power supply. If the plug does get wet, do not unplug the cable. Disconnect the circuit breaker that supplies power to the power supply point. Then unplug and examine the plug and power supply point for presence of water. If the power point has become wet, you should consult an electrician before using the power point again.
- Do not install or store the appliance where it will be exposed to extreme hot or cold temperatures. Do not use in water above 95°C.
- Do not cut the cable as this will result in voiding your warranty.
- Care should be taken to arrange the power cable so that it cannot be accidentally tripped over or pulled.
- Do not attempt to repair the electrical appliance yourself. Return to an authorized service center or place of purchase if a fault occurs, (regular maintenance is not considered repair and is required by user).

PRODUCT SPECIFIC SAFEGUARDS

- Do not operate the pump without water in your plumbing at any time, permanent damage may occur.
- When used in submerged application, be sure the equipment is completely in the water. The depth should not be greater than 6.5Ft.
- The pump is designed to be used inside skimmers, directly in a pond or in any other fresh water features.
- The pump should only be used in clean water. Do not use the pump in, or with, any chemicals such as a solvent or gasoline.
- The PondMAX Skimmer & Water Feature Pumps are cooled by water flowing through the inside of the motor body. If the pump flow becomes restricted it will overheat and could cause permanent damage. Large tubing size is strongly recommended to deliver adequate water flow to cool the pump.
- The pump needs to be cleaned regularly to prevent the pump becoming blocked, thus causing the pump to overheat and burn out. This is not a warrantable event. It is strongly recommended not to select a pump that is too small for the job required. The flow rate through the pump needs to be enough so that a half of the rated max flow is kept running at all times.



SKIMMER & WATER FEATURE PUMPS

INSTALLATION

For your convenience we have provided two different front filter screen. One has a built in flow control, that can be used to adjust the water flow if the flow is too fast for a particular installation. It is suggested that this specific front filter screen be used in clean water features.

The other Front Filter Screen contains a sponge filter insert. This filter is to be connected to the front of the pump to strain out the larger particles when using a fountain kit. This reduces the frequency of having to cleaning of the fountain nozzles as often. If using an optional fountain kit, select the filter cage with the sponge insert.

FOUNTAIN KIT SETUP GUIDE

A basic plastic fountain kit is not recommended for pumps that have flow over 1500 GPH. It's better to use commercial fountain nozzles for higher flow. See your dealer for examples.

For Pumps, from 250 GPH to 1200 GPH, there are a number of optional fountain kits readily available. PondMAX has three readily available. For various suggestions of the correct model and fountain type selection see the specification table on page (page 2).

For the purpose of these guidelines, a PondMAX #30 Jet kit has been selected. The installation principle will be similar for the other types.

NOTE: PondMAX #30 Jet kit has been selected as a sample.
Fountain kit NOT included with pump. Offered separately.



Using the 1" to 1/2" threaded Reducing Nipple (1), attach onto the Male Threaded outlet of the pump. Now secure the Dual-Control T Piece (2) onto threaded reducing nipple. Now on the top of the Dual-Control T Piece (2), connect the Threaded Reducing Adaptor (4) on. Now extend Telescopic Riser with Threaded Locking Nut (10) to the desired height, then secure onto the top (1" thread) of the Threaded Reducing Adapter with the threaded locking nut provided. Align Telescopic Riser with Threaded Locking Nut (10) vertically.

Select the desired nozzle, (7) (8) or (9), and screw into the Fountain Nozzle Threaded Mount. (6) Then attach the Fountain Nozzle Threaded Mount to the Telescopic Riser with Threaded Locking Nut (10).

Locate the Stepped Hosetail (5). Attach this to the side outlet of the Dual-Control T Piece to facilitate an optional accessory, for example; a small waterfall or spitter. Now, utilizing the two different Flow-Adjuster knobs (3), on either side of the T-Piece, you can vary the flow to the fountain head or the optional small waterfall/spitter outlet separately. Feel free to close off the side outlet of the Dual-Control T Piece, if it is not required. However if it is required, connect tubing to the Hosetail provided and direct the hose to your desired location.

Place the pump in desired location; ensure the pump is on a stable surface that is free of sludge, sand and other debris. Position the device in the pond horizontally, on a solid base, in such a way that it is fully covered with water and ensure that the pump is located, at a depth, in the water, which will not allow it to suck air from the surface. This is known as cavitation. Cavitation is a cause of premature impeller wear.

The fountain nozzle should now be protruding out of the water. Push the plug into the power supply outlet to switch on. Use the power supply switch for turning the unit on and off.

INSTALLATION PLUMBING GUIDE

For your convenience we have provided two different plumbing installation scenarios. **NOTE** If used in submersible applications, use the Hosetail.

SUBMERSIBLE USE

When used inside a pond skimmer / water feature environment, follow procedure as outlined below.


- For best results, use the tubing size recommended in the Technical Specification table. Depending on the pump size and your tubing size, select the Hosetail required for and evaluate which step on the Hosetail will be used. If you are using 1" hose and you are connecting it to the 3/4", 1", 1-1/4", 1-1/2" Hosetail supplied, remember to saw off the smaller size connection (I.E.: 3/4" step). Otherwise it will create an unnecessary restriction in the plumbing system.
- Select the 1-1/2" x 1" Reducer Bushing Fitting and thread onto the outlet of the pump (top). To seal adequately, the use of thread seal tape may be required (available at your local dealer).
- The fittings pack includes a red washer designed for the locking nut on the Hosetail. Place a washer firmly in the locking nut on the Hosetail fitting. Now thread the locking nut of the Hosetail onto the 1-1/2" x 1" Reducer Bushing Fitting on the pump. Fasten firmly but do not over tighten.
- Now connect the tubing to the Hosetail. Remember to use Stainless Steel Hose Clamps to fasten the hose on to the Hosetail barbs. This is to ensure that the pipe does not blow off at a later time or leak at this point in the plumbing system.
- Direct the hose to your desired location.

CLEANING INSTRUCTIONS

Begin by ensuring that the mains power supply is disconnected before attempting any maintenance of the unit or the water body. Remove the unit from the water. If your unit is connected to a sponge filter, the front screen and sponge will clog up over time. Please clean regularly (at least once a month) to ensure strong water flow. Failure to maintain the unit could result in a burnt out motor and other damage.

- All PondMAX Skimmer & Water Feature Pumps are water cooled. If pump becomes restricted or blocked, it may overheat and could cause permanent damage.
- The motor unit of the pump is encapsulated with epoxy resin and does not need lubrication. Regular inspections, cleaning and maintenance of impeller is necessary to ensure longer life. In the center of the impeller you may notice a small hole opening that protrudes through the ceramic shaft from front to back. It is important that this opening is kept unblocked at all times. This is a cooling channel for the motor.
- If using a fountain kit, take off the fountain set first by unscrewing it from the top of the pump. Examine the nozzles to ensure all ports are unblocked. Clean with a suitable brush if necessary.
- Maintain the filter sponge regularly according to how long it takes for the screen to get clogged up. When the flow starts to be reduced, check and clean if necessary.
- To unclip the front filter screen from the front of the pump, twist the cage in a counterclockwise direction and pull forward. See below for diagram. If available, take out the optional sponge and clean. It is recommended that this is done in a bucket of pond water to ensure the good bacteria present in the sponge are not killed by the chlorine in tap water. Check for wear and tear on the sponge and replace if necessary.
- You can help boost the biological function of your filter sponge with a bacterial additive, available from your local dealer.

SKIMMER & WATER FEATURE PUMPS

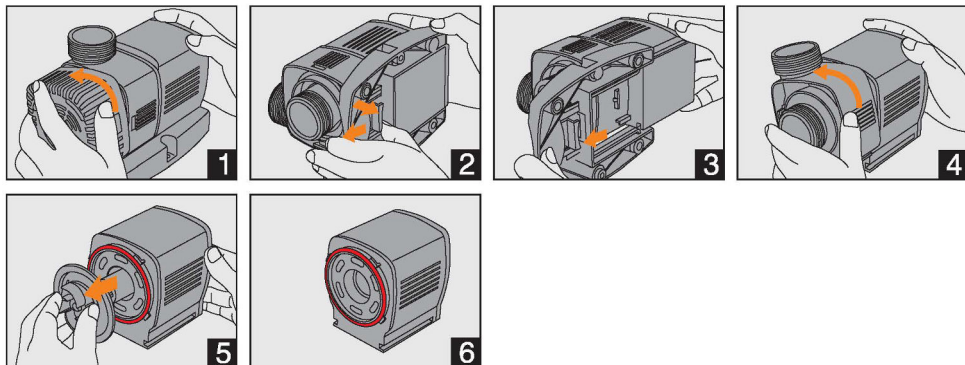

1. Turn the Front Filter Screen in the direction as indicated by the arrow, then pull away from Pump Motor Body.
2. Locate snap-fit release under Base Plate using the arrows above. Using your thumb, apply pressure and unclip Base Plate until it releases from Pump Motor Body.
3. Remove Base Plate by pulling away from pump motor in the direction of arrow above.
4. To remove the impeller of the pump, turn the Impeller Cover Housing in an counterclockwise direction as indicated by the arrow above, to the stop position. Then separate the Impeller cover from the Pump Motor Body.
5. With one hand gripping the Pump Motor Body, secure grip of other hand tightly on the fins of the Impeller and pull out the Impeller assembly (take care not to break ceramic shaft.) The black disc behind the fins of Impeller is part of the Impeller assembly. Clean the Impeller with water and vinegar and a suitable brush taking note to remove fine sediment on and around the back end of the Impeller, the small hole through the ceramic shaft and the chamber the Impeller fits into on the Pump Motor Body. (Always inspect the Impeller and replace the Impeller if it seems necessary.)
6. Ensure to replace the O'ring as shown above when reinstalling the Impeller.
(See "IMPORTANT NOTES" section below for reassembly instructions)

IMPORTANT NOTES

- It is important that this procedure is carried out regularly as the cooling path inside the motor can become clogged. If the impeller assembly becomes worn or damaged it should be replaced (available from your dealer). Failure to do so may cause serious damage to pump. Inspect for signs for wear and tear. The impeller set is a wearable part.
- Once the cleaning and inspection process is completed, reassemble in the reverses manner. Reinstall the impeller into the motor body.

To place the Impeller O'ring around the black disc successfully, firmly hold the disc with one hand, and using the other hand stretch the O'ring over the disc, positioning it carefully into the groove. Pay attention not to allow the O'ring to roll forward, in-between the black disc and the Pump Motor Body.

With the impeller in the correct position, carefully place the Impeller Cover Housing on, and then rotate clockwise back into position.

- If applicable re-insert the internal Sponge back into the filter screen and re-attach to the pump. On other models re-attach the Front Filter Screen.
- Now re-attach the Base Plate into position to lock the impeller cover from turning.




EXPLODED VIEW

1	Front Filter Screen - for Sponge
2	Sponge
3	Flow Control Knob (EV700 - EV1200 Only)
4	Front Filter Screen - with Hole For Flow Control (EV700 - EV1200 Only)
Not Shown	Blanking Cap for Hole in Front Filter Screen (optional)
5	1" Coupling Fitting x2 - for Inlet & Outlet
6	Impeller Cover Housing
7	Impeller Assembly
8	Impeller O'ring
9	Base Plate with Rubber Feet
10	Pump Motor Body
11	1" x 1-1/2" Reducer Bushing Fitting
12	Washer - for Locking Nut (Red)
13	3/4", 1", 1-1/4" & 1-1/2" Barbed Hosetail with Locking Collar



NOTE: Parts and features differ from model to model. All images used are for illustrative purposes only. Not all features depicted apply to all models in the range and these are subject to change.

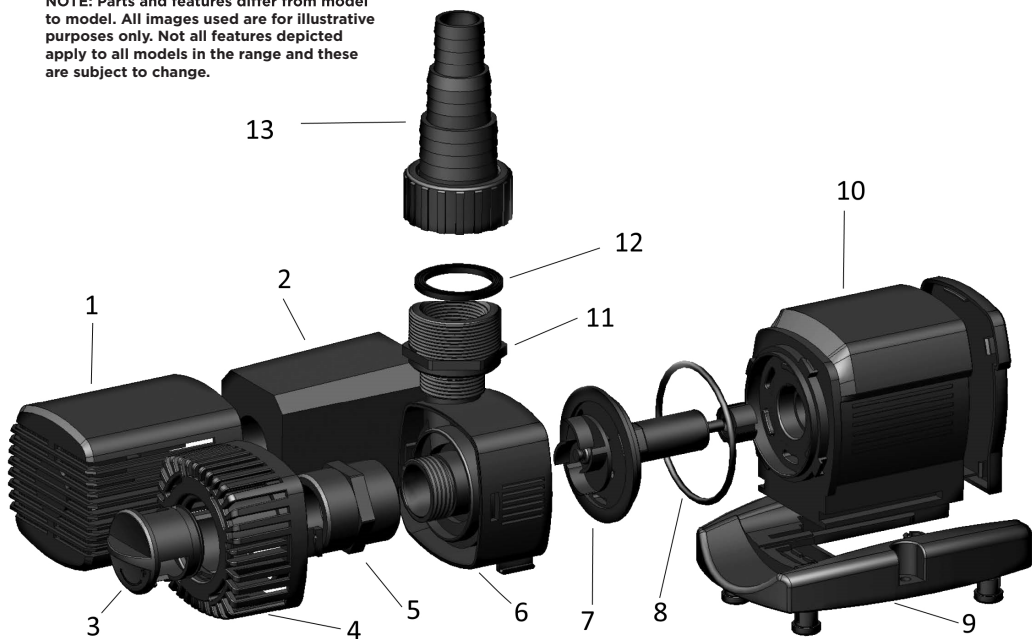

IMPORTANT

These accessories and attachments are recommended for use with your PondMAX product specified in this manual. The use of any other accessories or attachments might present a risk of injury to persons. Only use the accessory or attachment for its stated purpose.

SKIMMER & WATER FEATURE PUMPS

SPARE PARTS

PART NO.	DESCRIPTION	EV700	EV900	EV1200
1	Front Filter Screen - for Sponge	31EV130		
2	Sponge			
3	Flow Control Knob - [EV700 - EV1200 Only]	31EV127		
4	Front Filter Screen - With Hole for Flow Control - [EV700 - EV1200 Only]			
Not Shown	Blanking Cap for Hole in Front Filter Screen (optional)			
5	1" Coupling Fitting x 2 - for inlet & outlet			
6	Impeller Cover Housing	31EV126		
7	Impeller Assembly	31EV125	31EV155	31EV175
8	Impeller O'ring			
9	Base Plate with Rubber Feet	31EV129		
10	Pump Motor Body			
11	1" x 1-1/2" Reducer Bushing Fitting			
12	Washer - for Locking Nut (Red)			
13	3/4", 1", 1-1/4" & 1-1/2" Barbed Hosetail with Locking Nut			
5, 11, 12, 13	Complete Kit EV700-EV1200 - Coupling Fitting x2, Reducer Bushing Fittings, Washer (Red) & Barbed Hosetail with Locking Nut	31EV128		
14	Female Coupling	31EV100		

TROUBLESHOOTING

Problem	Reason	Solution
WATER PUMP NOT WORKING	No Power	Check that the plug is connected and power point turned on.
	Filter Screen or Sponge is blocked with sludge.	Clean the Filter Screen or Sponge.
	Impeller is blocked with sludge or lime scale build up.	Clean the Impeller as per the instructions.
	Running without sufficient water.	Submerge the equipment underwater then plug in. Refill if necessary.
	Blocked Impeller chamber or ceramic shaft is broken.	Clean the Impeller. Check for wear. Replace if necessary.
WATER PUMP IS NOISY	Blockage in pump.	Clear the blockage.
	Impeller & Shaft worn out.	Replace Impeller Assembly.
	Impeller broken.	Replace Impeller Assembly.
	Water level in feature is too low.	Refill feature with water to appropriate height.
	Unit inlet is blocked or the water pump outlet is blocked.	Clear all blockages.
	The height to which you are pumping is too high for the given model of pump.	Select a bigger model.

SKIMMER & WATER FEATURE PUMPS

LIMITED PRODUCT WARRANTY

- CMT Group LLC, a California limited liability company d/b/a PondMAX™ USA (the "Company") expressly warrants to the original purchaser that, for a period of two (2) years from the date of sale, the covered product (the "Product") will be reasonably free of defects in materials and workmanship and that when properly handled, will conform, within accepted tolerance to applicable manufacturing specifications. This Limited Product Warranty ("Limited Warranty") only applies to Company's Products that are used, stored, handled, and installed in the manner recommended by the Company in the Product instruction manual.
- Notwithstanding this Limited Warranty, customer acknowledges that some parts of the Product are consumable and may need to be replaced as part of ongoing Product maintenance, as recommended in the Product instruction manual, and are therefore not covered by this Limited Warranty.
- Company will, at its option, repair or replace Product without charge, if the Product fails or does perform as warranted solely due to a manufacturing defect within the warranty period, subject to the exclusions set forth in this Limited Warranty.
- Repair or replacement during this two (2) year warranty shall not include: reasonable labor charges necessary to repair or replace the defective Product, shipping costs, and packing and insurance costs. During the entire two (2) year warranty, Company's obligation as to repair or replacement shall further be limited to repair or replacement with the models of the Product that are available at the time of the repair or replacement, and shall be limited to the repair or replacement of only the specific Product that fails due to a manufacturing defect. Any repaired or replaced Product shall also remain subject to the original two (2) year warranty from the date of the original sale, and any repair or replacement shall not extend the original warranty period in any manner or start a new warranty period.
- You may obtain coverage under this Limited Warranty by providing Company with proof of original purchase. For service under this Limited Warranty, you must first contact the seller, distributor, retailer, or dealer from whom you purchased the Product and provide the following: copy of original receipt, your name and address, a description of the Product (including the serial number/date code set forth on the Product), and the nature of the defect. To expedite any warranty claims and processing, please submit to us the product registration card included with your purchased Product promptly after your purchase.
- All warranty repairs must be performed by the Company, or a Company authorized third-party. Any repairs performed by you or an unauthorized third-party will not be compensated by Company and are not the responsibility of the Company and will void this warranty.
- **DISCLAIMER OF WARRANTIES:** Company's Products must be stored, handled, installed, used, and maintained in accordance with instructions provided by Company, and this Limited Warranty is conditioned upon compliance with all such instructions. Copies of the Company's use guide/care guide are included with the Product and available from the Company at the address listed below. You may also obtain these materials by contacting Company at (888) 868-1185 or on the Company's website www.pondmax.com.
- This Limited Warranty does not cover defects caused by:
 - non-compliance with Company's use guides, care guides, and/or instruction manual. Such failures include, but are not limited to, exposure to physical abuse, including, but not limited to chemical abuse (e.g. harsh cleansers and solvents), thermal abuse or shock (e.g. excessive heat or cold), incompatibility of fluid used near the Product, or misuse;
 - improper storage, installation, handling, and/or use of the Product;
 - damage not resulting from manufacturing defects that occur while the Product is in the customer's possession;
 - unreasonable or unintended use of Product;
 - products installed with known or visible manufacturing defects at the time of installation;
 - minor conditions such as stains, scratches, etc.
- Any information or suggestion by Company with respect to the Products concerning applications, specifications, or compliance with codes and standards is provided solely for your convenient reference and are made without any representation as to accuracy or suitability. You must verify and test the suitability of any information with respect to the Products for your specific application.
- **THE WARRANTIES SET FORTH IN THIS LIMITED WARRANTY ARE THE ONLY WARRANTIES MADE BY COMPANY IN CONNECTION WITH THE PRODUCT. COMPANY CAN NOT AND DOES NOT MAKE ANY IMPLIED OR EXPRESS WARRANTIES WITH RESPECT TO THE PRODUCT, AND DISCLAIMS ALL OTHER WARRANTIES, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. PRODUCTS SOLD BY COMPANY ARE SOLD ONLY TO THE SPECIFICATIONS SPECIFICALLY SET FORTH BY COMPANY IN WRITING. OTHER THAN THE LIMITED WARRANTY SET FORTH HEREIN, COMPANY MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED. COMPANY'S SOLE OBLIGATION UNDER THIS WARRANTY SHALL BE REPAIR OR REPLACEMENT OF NON-CONFORMING PRODUCTS. BUYER ASSUMES ALL RISK WHATSOEVER AS TO THE RESULT OF THE USE OF THE PRODUCTS PURCHASED, WHETHER USED SINGULARLY OR IN COMBINATION WITH ANY OTHER PRODUCTS OR SUBSTANCES.**
- **LIMITATION OF LIABILITY:** No claim by the buyer/owner of any kind, including claims for indemnification, shall be greater in amount than the purchase price of the Product in respect to which damages are claimed. IN NO EVENT SHALL COMPANY BE LIABLE TO BUYER/OWNER IN TORT, CONTRACT OR OTHERWISE, FOR ANY SPECIAL, INDIRECT, INCIDENTAL, CONSEQUENTIAL, RELIANCE, STATUTORY, SPECIAL, PUNITIVE OR EXEMPLARY DAMAGES, INCLUDING, BUT NOT LIMITED TO, LOST PROFITS, LOSS OF USE, LOSS OF TIME, LOSS OF REVENUES, INCONVENIENCE, LOSS BUSINESS OPPORTUNITIES, DAMAGE TO GOOD WILL OR REPUTATION, OR LOSS OF DATA, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR SUCH DAMAGES COULD HAVE BEEN REASONABLY FORESEEN, IN CONNECTION WITH, ARISING OUT OF, OR AS A RESULT OF, THE SALE, DELIVERY, SERVICING, USE OR LOSS OF USE OF THE PRODUCT SOLD HEREUNDER, OR FOR ANY LIABILITY OF BUYER TO ANY THIRD PARTY WITH RESPECT THERETO.
- All provisions of this Limited Warranty are severable and if any provision shall be deemed invalid, the remaining provisions shall remain in full force and effect.
- Please consult your retailer for quality original Company replacement parts.
- Visit www.pondmax.com for your nearest dealer.
- **Contact Information:**
 - Any question concerning this warranty should be addressed to:
PondMAX USA
P.O. Box, 341
San Leandro, CA 94577
Phone: 888.868.1185
Email: info@pondmax.com
Website address: <https://pondmax.com>



WATERGARDENING TO THE MAX

888.868.1185

info@pondmax.com

PondMAX

WATERGARDENING TO THE MAX

SKIMMER & WATER FEATURE PUMP

INSTRUCTION MANUAL



evoli
SERIES

888.868.1185

info@pondmax.com

www.pondmax.com

FOR MODELS:

**22EV200 - EV1800
22EV225 - EV2400
22EV250 - EV3000
22EV275 - EV3600**

VERSION
APR 2026

PondMAX**evoli**
SERIES

WELCOME TO THE WORLD OF **PONDMAX™**.
YOU MADE THE **RIGHT** CHOICE INVESTING IN THIS
QUALITY PRODUCT. THANK YOU AND **ENJOY**.

BEFORE USING THIS PRODUCT, PLEASE READ THESE INSTRUCTIONS CAREFULLY AND
BECOME FAMILIAR WITH THE UNIT. PLEASE KEEP THESE INSTRUCTIONS IN A SAFE PLACE
FOR FUTURE REFERENCE.

TECHNICAL SPECIFICATIONS

DESCRIPTION	EV1800	EV2400	EV3000	EV3600
MAXIMUM WATER FLOW(GPH)	1800	2400	3000	3600
MAXIMUM HEAD (FT)	16	20	21	22
POWER CONSUMPTION* (W)	60	100	125	160
VOLTS (V)	115	115	115	115
FREQUENCY (HZ) AC	60	60	60	60
INLET Ø THREAD (INCH)	1½	1½	1½	1½
OUTLET Ø THREAD (INCH)	1½	1½	1½	1½
THREADED BALL JOINT INCLUDED	Yes	Yes	Yes	Yes
CABLE LENGTH (FT)	32	32	32	32
RECOMMENDED TUBING SIZE (INCH) ID	1-½	1-½	1-½	1-½

* SUBJECT TO VARIATION ACCORDING TO LOAD

OTHER MODELS AVAILABLE IN THE EVOII RANGE	EV700	EV900	EV1200
MAXIMUM WATER FLOW(GPH)	700	900	1200
MAXIMUM HEAD (FT)	10	14	15.5
VOLTS (V)	115	115	115

SKIMMER & WATER FEATURE PUMPS

DESIGN HIGHLIGHTS

The PondMAX EVOII Skimmer & Water Feature Pumps have been manufactured to provide you with the best quality pumps for your water feature. Visit our website to view our range of pond filtration, outdoor/underwater lighting, water treatments and general accessories.

- **SMART MAG™ Motor Protection** - Provides longevity by preventing motor burnout.
 - **Energy Efficient** - Exceptionally low power consumption to high-head height / high-volume flow conversion.
 - **Threaded Inlet & Outlet** - Suitable for submersible operation and can adapt to different fittings provided.
 - **Can Be Installed Vertical or Horizontal** - Provides flexibility for installation in many different applications.
 - **Open Vane Impeller Design** - Handles large particles and resists clogging.
 - **Tool-less Assembly** - For easy maintenance. No special tools required.
-

BENEFITS INCLUDE

- PondMax Skimmer & Water Feature pumps are suitable for use in many different applications including skimmers, water features, aquatic systems and hydroponics. Your pump can be used in submersible applications.
- Skimmer & Water Feature pumps are a magnetically driven pump, therefore they cannot suck from a water level that is below the inlet level.
- Your pump has a single moving part (an impeller) enabling easy cleaning and maintenance.
- The models EV700 - EV3600 Pumps have SMART MAG™ motor protection, which analyses the speed and torque of the motor.
- SMART MAG™ intelligent circuitry also provides a soft start for the pump on startup and helps to avoid any sudden jolting. The intelligent system will change the motor speed to maximize the flow of water in the given circumstances.
- Also if the Impeller gets jammed or stops, the circuitry will sense the state and cut the power automatically for 3 seconds and then power up again. This procedure will repeat 3 times. If the rotor is still jammed, it will activate a prolonged low state, till the pump is turned off, and adequate maintenance is carried out. Thus minimizing motor burnout, due to electrical heat, through lack of water flow through the motor.
- The motor and electrical components are totally encapsulated in epoxy resin, ensuring safe operation under water.
- Skimmer & Water Feature pumps rely on water to cool and lubricate it. Therefore no harmful oil or grease lubrication is required.
- PondMAX Skimmer & Water Feature Pumps are continuous rated therefore are designed to operate 24/7.

PondMAX

evoli SERIES



IMPORTANT SAFEGUARDS

Correct and safe use of the system requires strict compliance with the safety instructions. For safety reasons, persons less than 16 years of age or persons that are not familiar with these instructions should not use this equipment.

- Any damage to the equipment or unmerited operation will bring dangers to the surrounding precincts. If there is any damage of the equipment, it must not be used. The equipment should be placed out of reach of children.
- For your own safety, disconnect from the power supply before any maintenance. Always unplug the pump from the power supply when not in use. Never pull the cable to disconnect the plug from the power supply - grasp the plug and pull to disconnect. If required, have a qualified electrician install a weatherproof power supply point near to the pond or water-feature (within the cable length of the appliance).
- When used in submerged application, be sure the equipment is completely in the water. The depth should not be greater than 6.5Ft.
- Do not operate the pump if the appliance or any components of the system, such as the power cable, has been damaged. Check appliance for defects regularly.
- For safety, plug the pump into an electrical outlet with a (GCFI) Ground Fault Circuit Interrupter.
- To avoid an electric shock, do not attach the plug to the power supply socket with wet hands. The drip loop method should be used to prevent water from traveling down the cable and onto the plug or power supply. If the plug does get wet, do not unplug the cable. Disconnect the circuit breaker that supplies power to the power supply point. Then unplug and examine the plug and power supply point for presence of water. If the power point has become wet, you should consult an electrician before using the power point again.
- Do not install or store the appliance where it will be exposed to extreme hot or cold temperatures. Do not use in water above 95°C.
- Do not cut the cable as this will result in voiding your warranty.
- Care should be taken to arrange the power cable so that it cannot be accidentally tripped over or pulled.
- Do not attempt to repair the electrical appliance yourself. Return to an authorized service center or place of purchase if a fault occurs, (regular maintenance is not considered repair and is required by user).

PRODUCT SPECIFIC SAFEGUARDS

- Do not operate the pump without water in your plumbing at any time, permanent damage may occur.
- When used in submerged application, be sure the equipment is completely in the water. The depth should not be greater than 6.5Ft.
- The pump is designed to be used inside skimmers, directly in a pond or in any other fresh water features.
- The pump should only be used in clean water. Do not use the pump in, or with, any chemicals such as a solvent or gasoline.
- The PondMAX Skimmer & Water Feature Pumps are cooled by water flowing through the inside of the motor body. If the pump flow becomes restricted it will overheat and could cause permanent damage. Large tubing size is strongly recommended to deliver adequate water flow to cool the pump.
- The pump needs to be cleaned regularly to prevent the pump becoming blocked, thus causing the pump to overheat and burn out. This is not a warrantable event. It is strongly recommended not to select a pump that is too small for the job required.



PONDMAX.COM

SKIMMER & WATER FEATURE PUMPS

INSTALLATION

For your convenience we have provided two different plumbing scenarios. Note: If used in submersible applications, use the hosetial fittings.


SUBMERSIBLE USE: When used inside a pond skimmer / water feature environment, follow procedure as outlined below.

- For best results, use the tubing size recommended in the Technical Specification table. Depending on the pump size and your tubing size, select the Hosetail required for and evaluate which step on the Hosetail will be used. If you are using 1-1/2" hose and you are connecting it to the 3/4", 1", 1-1/4", 1-1/2" Hosetail supplied, remember to saw off the smaller size connection (I.E.: 3/4", 1", 1-1/4" step). Otherwise it will create an unnecessary restriction in the plumbing system.
- A Swivel Ball Joint Fitting is provided for your convenience when used specifically in a submersible application. This is because the diagonal side sections of the ball-joint may seep water when in use. The fittings pack also includes the necessary red washers. Select the one that will fit the female connection of the ball-joint. Place it firmly in the locking nut. Now screw the locking nut of the ball-joint onto the outlet of the pump. Fasten firmly but do not over tighten.
- Place a red washer firmly in the locking nut on the Hosetail fitting. Now thread the locking nut of the Hosetail onto the Swivel Ball Joint Fitting. Fasten firmly but do not over tighten.
- Now connect the tubing to the Hosetail. Remember to use Stainless Steel Hose Clamps to fasten the hose on to the Hosetail barbs. This is to ensure that the pipe does not blow off at a later time or leak at this point in the plumbing system.
- Direct the hose to your desired location.

CLEANING INSTRUCTIONS

Begin by ensuring that the main power supply is disconnected before attempting any maintenance of the unit or the water body. Remove the unit from the water. Please clean regularly (at least once a month) to ensure strong water flow. Failure to maintain the unit could result in a burnt out motor and other damage.

- All PondMAX Skimmer & Water Feature Pumps are water cooled. If pump becomes restricted or blocked, it may overheat and could cause permanent damage.
- The motor unit of the pump is encapsulated with epoxy resin and does not need lubrication. Regular inspections, cleaning and maintenance of impeller is necessary to ensure longer life. In the center of the impeller you may notice a small hole opening that protrudes through the ceramic shaft from front to back. It is important that this opening is kept unblocked at all times. This is a cooling channel for the motor.
- To unclip the front filter screen from the front of the pump, twist the cage in a counterclockwise direction and pull forward. See below for diagram.
- Now with the Front Filter Screen off, go ahead and clean the screen. Make sure. Examine the openings in screen to ensure all are unblocked. Clean with a suitable brush if necessary.

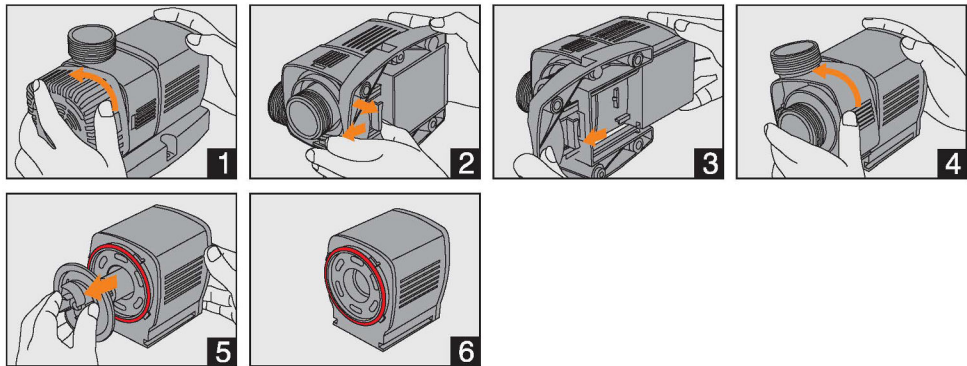

1. Turn the Front Filter Screen in the direction as indicated by the arrow, then pull away from Pump Motor Body.
2. Locate snap-fit release under Base Plate using the arrows above. Using your thumb, apply pressure and unclip Base Plate until it releases from Pump Motor Body.
3. Remove Base Plate by pulling away from pump motor in the direction of arrow above.
4. To remove the impeller of the pump, turn the Impeller Cover Housing in an counterclockwise direction as indicated by the arrow above, to the stop position. Then separate the Impeller cover from the Pump Motor Body.
5. With one hand gripping the Pump Motor Body, secure grip of other hand tightly on the fins of the Impeller and pull out the Impeller assembly (take care not to break ceramic shaft.) The black disc behind the fins of Impeller is part of the Impeller assembly. Clean the Impeller with water and vinegar and a suitable brush taking note to remove fine sediment on and around the back end of the Impeller, the small hole through the ceramic shaft and the chamber the Impeller fits into on the Pump Motor Body. (Always inspect the Impeller and replace the Impeller if it seems necessary.)
6. Ensure to replace the O'ring as shown above when reinstalling the Impeller.
(See "IMPORTANT NOTES" section below for reassembly instructions)

SKIMMER & WATER FEATURE PUMPS

IMPORTANT NOTES

- It is important that this procedure is carried out regularly as the cooling path inside the motor can become clogged. If the impeller assembly becomes worn or damaged it should be replaced (available from your dealer). Failure to do so may cause serious damage to pump. Inspect for signs for wear and tear. The impeller set is a wearable part.
- Once the cleaning and inspection process is completed, reassemble in the reverse manner. Reinstall the impeller into the motor body.

To place the Impeller O'ring around the black disc successfully, firmly hold the disc with one hand, and using the other hand stretch the O'ring over the disc, positioning it carefully into the groove. Pay attention not to allow the O'ring to roll forward, in-between the black disc and the Pump Motor Body.

With the impeller in the correct position, carefully place the Impeller Cover Housing on, and then rotate clockwise back into position.

- Now reattach Front Filter Screen to the pump, by rotating clockwise.
- Now re-attach the Base Plate into position to lock the impeller cover from turning.




EXPLODED VIEW

- 1 Front Filter Screen (EV1800) (EV2400-EV3600)
- 2 Impeller Cover Housing
- 3 Impeller Assembly
- 4 Impeller O-Ring
- 5 Base Plate with Rubber Feet
- 6 Pump Motor Body
- 7 1-1/2" Coupling Fitting X2- for Inlet & Outlet
- 8 Swivel Ball Joint Fitting
- 9 Washers - for Locking Nuts (Red)
- 10 3/4", 1", 1-1/4" & 1-1/2" Barbed Hosetail with Locking Nut
- 11 SCH. 40 Adapter with Locking Nut- 1 1/2" Slip X2



NOTE: Parts and features differ from model to model. All images used are for illustrative purposes only. Not all features depicted apply to all models in the range and these are subject to change.

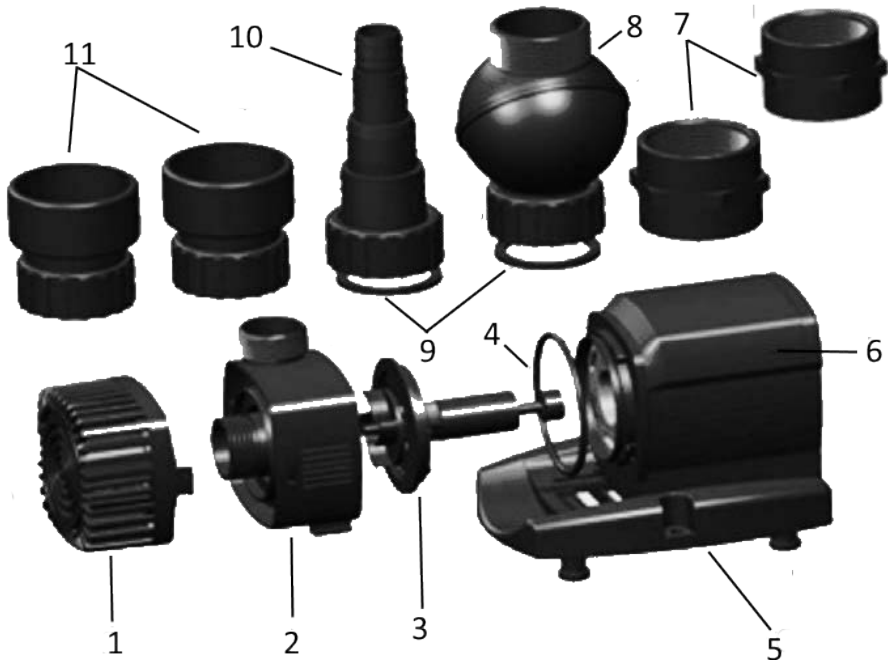

IMPORTANT

These accessories and attachments are recommended for use with your PondMAX product specified in this manual. The use of any other accessories or attachments might present a risk of injury to persons. Only use the accessory or attachment for its stated purpose.

SKIMMER & WATER FEATURE PUMPS

SPARE PARTS

PART NO.	DESCRIPTION	EV1800	EV2400	EV3000	EV3600
1	Front Filter Screen	31EV202	31EV227		
2	Impeller Cover Housing	31EV201	31EV226		
3	Impeller Assembly	31EV200	31EV225	31EV250	31EV275
4	Impeller O'ring				
5	Base Plate with Rubber Feet	31EV204	31EV228		
6	Pump Motor Body				
7	1" x 1-1/2" Coupling Fitting x 2 - for inlet & outlet	31EV112			
8	Swivel Ball Joint Fitting SCH. 40 Adapter with Locking Nut- 1 1/2" Slip				
9	Washer - for Locking Nut (Red)				
10	3/4", 1", 1-1/4" & 1-1/2" Barbed Hosetail with Locking Nut				
11	SCH. 40 Adapter with Locking Nut- 1 1/2" Slip				
7, 8, 9, 10,11	Complete Kit EV1800-EV3600 - Coupling Fitting x2, SCH. 40 Adapter x2, Washer (Red) & Barbed Hosetail with Locking Nut.	31EV203			

TROUBLESHOOTING

Problem	Reason	Solution
WATER PUMP NOT WORKING	No Power	Check that the plug is connected and power point turned on.
	Filter Screen blocked with sludge.	Clean the Filter Screen.
	Impeller is blocked with sludge or lime scale build up.	Clean the Impeller as per the instructions.
	Running without sufficient water.	Submerge the equipment underwater then plug in. Refill if necessary.
	Blocked Impeller chamber or ceramic shaft is broken.	Clean the Impeller. Check for wear. Replace if necessary.
WATER PUMP IS NOISY	Blockage in pump.	Clear the blockage.
	Impeller & Shaft worn out.	Replace Impeller Assembly.
	Impeller broken.	Replace Impeller Assembly.
	Water level in feature is too low.	Refill feature with water to appropriate height.
	Unit inlet is blocked or the water pump outlet is blocked.	Clear all blockages.
	The height to which you are pumping is too high for the given model of pump.	Select a bigger model.

SKIMMER & WATER FEATURE PUMPS

LIMITED PRODUCT WARRANTY

- CMT Group LLC, a California limited liability company d/b/a PondMAX™ USA (the "Company") expressly warrants to the original purchaser that, for a period of two (2) years from the date of sale, the covered product (the "Product") will be reasonably free of defects in materials and workmanship and that when properly handled, will conform, within accepted tolerance to applicable manufacturing specifications. This Limited Product Warranty ("Limited Warranty") only applies to Company's Products that are used, stored, handled, and installed in the manner recommended by the Company in the Product instruction manual.
- Notwithstanding this Limited Warranty, customer acknowledges that some parts of the Product are consumable and may need to be replaced as part of ongoing Product maintenance, as recommended in the Product instruction manual, and are therefore not covered by this Limited Warranty.
- Company will, at its option, repair or replace Product without charge, if the Product fails or does perform as warranted solely due to a manufacturing defect within the warranty period, subject to the exclusions set forth in this Limited Warranty.
- Repair or replacement during this two (2) year warranty shall not include: reasonable labor charges necessary to repair or replace the defective Product, shipping costs, and packing and insurance costs. During the entire two (2) year warranty, Company's obligation as to repair or replacement shall further be limited to repair or replacement with the models of the Product that are available at the time of the repair or replacement, and shall be limited to the repair or replacement of only the specific Product that fails due to a manufacturing defect. Any repaired or replaced Product shall also remain subject to the original two (2) year warranty from the date of the original sale, and any repair or replacement shall not extend the original warranty period in any manner or start a new warranty period.
- You may obtain coverage under this Limited Warranty by providing Company with proof of original purchase. For service under this Limited Warranty, you must first contact the seller, distributor, retailer, or dealer from whom you purchased the Product and provide the following: copy of original receipt, your name and address, a description of the Product (including the serial number/date code set forth on the Product), and the nature of the defect. To expedite any warranty claims and processing, please submit to us the product registration card included with your purchased Product promptly after your purchase.
- All warranty repairs must be performed by the Company, or a Company authorized third-party. Any repairs performed by you or an unauthorized third-party will not be compensated by Company and are not the responsibility of the Company and will void this warranty.
- **DISCLAIMER OF WARRANTIES:** Company's Products must be stored, handled, installed, used, and maintained in accordance with instructions provided by Company, and this Limited Warranty is conditioned upon compliance with all such instructions. Copies of the Company's use guide/care guide are included with the Product and available from the Company at the address listed below. You may also obtain these materials by contacting Company at (888) 868-1185 or on the Company's website www.pondmax.com.
- This Limited Warranty does not cover defects caused by:
 - non-compliance with Company's use guides, care guides, and/or instruction manual. Such failures include, but are not limited to, exposure to physical abuse, including, but not limited to chemical abuse (e.g. harsh cleansers and solvents), thermal abuse or shock (e.g. excessive heat or cold), incompatibility of fluid used near the Product, or misuse;
 - Improper storage, installation, handling, and/or use of the Product;
 - damage not resulting from manufacturing defects that occur while the Product is in the customer's possession;
 - unreasonable or unintended use of Product;
 - products installed with known or visible manufacturing defects at the time of installation;
 - minor conditions such as stains, scratches, etc.
- Any information or suggestion by Company with respect to the Products concerning applications, specifications, or compliance with codes and standards is provided solely for your convenient reference and are made without any representation as to accuracy or suitability. You must verify and test the suitability of any information with respect to the Products for your specific application.
- **THE WARRANTIES SET FORTH IN THIS LIMITED WARRANTY ARE THE ONLY WARRANTIES MADE BY COMPANY IN CONNECTION WITH THE PRODUCT. COMPANY CAN NOT AND DOES NOT MAKE ANY IMPLIED OR EXPRESS WARRANTIES WITH RESPECT TO THE PRODUCT, AND DISCLAIMS ALL OTHER WARRANTIES, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. PRODUCTS SOLD BY COMPANY ARE SOLD ONLY TO THE SPECIFICATIONS SPECIFICALLY SET FORTH BY COMPANY IN WRITING. OTHER THAN THE LIMITED WARRANTY SET FORTH HEREIN, COMPANY MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED. COMPANY'S SOLE OBLIGATION UNDER THIS WARRANTY SHALL BE REPAIR OR REPLACEMENT OF NON-CONFORMING PRODUCTS. BUYER ASSUMES ALL RISK WHATSOEVER AS TO THE RESULT OF THE USE OF THE PRODUCTS PURCHASED, WHETHER USED SINGULARLY OR IN COMBINATION WITH ANY OTHER PRODUCTS OR SUBSTANCES.**
- **LIMITATION OF LIABILITY:** No claim by the buyer/owner of any kind, including claims for indemnification, shall be greater in amount than the purchase price of the Product in respect to which damages are claimed. IN NO EVENT SHALL COMPANY BE LIABLE TO BUYER/OWNER IN TORT, CONTRACT OR OTHERWISE, FOR ANY SPECIAL, INDIRECT, INCIDENTAL, CONSEQUENTIAL, RELIANCE, STATUTORY, SPECIAL, PUNITIVE OR EXEMPLARY DAMAGES, INCLUDING, BUT NOT LIMITED TO, LOST PROFITS, LOSS OF USE, LOSS OF TIME, LOSS OF REVENUES, INCONVENIENCE, LOSS BUSINESS OPPORTUNITIES, DAMAGE TO GOOD WILL OR REPUTATION, OR LOSS OF DATA, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR SUCH DAMAGES COULD HAVE BEEN REASONABLY FORESEEN, IN CONNECTION WITH, ARISING OUT OF, OR AS A RESULT OF, THE SALE, DELIVERY, SERVICING, USE OR LOSS OF USE OF THE PRODUCT SOLD HEREUNDER, OR FOR ANY LIABILITY OF BUYER TO ANY THIRD PARTY WITH RESPECT THERETO.
- All provisions of this Limited Warranty are severable and if any provision shall be deemed invalid, the remaining provisions shall remain in full force and effect.
- Please consult your retailer for quality original Company replacement parts.
- Visit www.pondmax.com for your nearest dealer.
- **Contact Information:**
 - Any question concerning this warranty should be addressed to:
PondMAX USA
P.O. Box, 341
San Leandro, CA 94577
Phone: 888.868.1185
Email: info@pondmax.com
Website address: <https://pondmax.com>



WATERGARDENING TO THE MAX

888.868.1185
info@pondmax.com